


	Scanning distance 12.5 mm
Luminescence scanners	

- Switching threshold adjustment for low fluorescence
- Static Teach-in to mark and/or background via control cable or control panel on unit
- Switching frequency 500/s and 2000/s
- M12 equipment plug


Dimension illustration

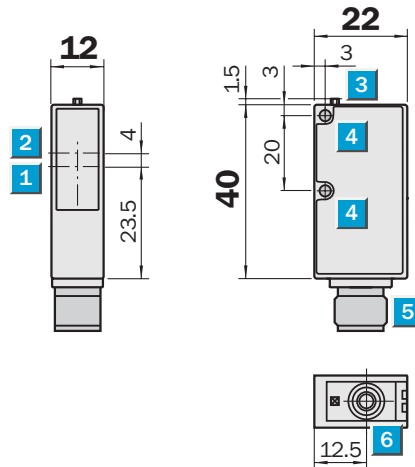

Adjustments possible

LUT2-P1116

LUT2-N1116

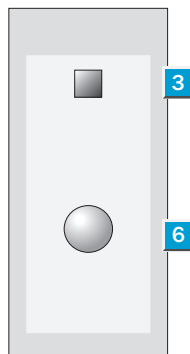


- 1 Axis of the sender optics
- 2 Axis of the receiver optics
- 3 LED signal strength indicator
- 4 Mounting hole; Ø 3.2 mm
- 5 Plug M12, 4-pin
- 6 Teach-in button


Connection type

LUT2-P1116

LUT2-N1116



4-pin, M12



See chapter Accessories

Connectors

Mounting systems



Technical data		LUT2	P1116	N1116								
Scanning distance	12.5 mm											
from front panel												
Wavelength	370 nm											
Light spot dimensions	2 x 2.5 mm											
Light source¹⁾, light type	UV light source											
Supply voltage V_S	24 VDC \pm 20 %											
Ripple ²⁾	< 5 V _{pp}											
Current consumption ³⁾	< 30 mA											
Switching outputs	NPN: HIGH = V_S / LOW = < 2 V											
	PNP: HIGH = V_S - < 2 V / LOW = ca. 0 V											
Output current I_A max.	100 mA											
Response time ⁴⁾	1 ms/250 μ s											
Switching frequency ⁵⁾	500/s and 2000/s											
Teach-in input ET	PNP: Teach > 10 V ... $\leq V_S$											
	NPN: Teach 0 V											
Connection type	Plug 4-pin, M12											
VDE protection class⁶⁾	□											
Enclosure rating	IP 67											
Circuit protection⁷⁾	A, B, C											
Ambient temperature	Operation -10 ... +55 °C											
	Storage -25 ... +75 °C											
Shock load	To IEC 68											
Weight	Approx. 80 g											
Housing material	ABS											

¹⁾ Average service life 100,000 h at $T_A = +25$ °C
²⁾ May not exceeded or fall short of V_S tolerances
³⁾ Without load
⁴⁾ Signal transit time with resistive load
⁵⁾ With light/dark ratio 1:1
⁶⁾ Reference voltage 50 V DC
⁷⁾ A = V_S connections reverse-polarity protected
B = Outputs short-circuit protected
C = Interference pulse suppression

Sensitivity adjustment	Order information	
Standard applications are available with default setting of the LUT2, no Teach-in procedure is necessary. Sensor with fix switching threshold and switching frequency 2000/s.	Type	Order no.
	LUT2-P1116	1 023 500
	LUT2-N1116	1 023 501

For low fluorescence of the mark and in the case of background fluorescence the sensitivity is set automatically with Teach-in via control panel or via control wire.

Teach-in via control panel:

- Place mark in light spot.
- Press the Teach-in button on the sensor for longer than 1 s.
First Teach-in procedure is triggered.
- Place the light spot on the background.
Second Teach-in procedure is triggered.

Teach-in via control wire:

- Place mark in light spot.
- Trigger the first Teach-in procedure via the control wire.
- Place the light spot on the background, and then trigger the second Teach-in procedure via the control wire.

Confirmation:

LED and status indicator do not blink = Teach-in procedure completed with standard sensitivity (2000/s).
LED and status indicator blink 2 x shortly = Teach-in procedure completed with high sensitivity (500/s).
LED and status indicator blink rapidly = Teach-in procedure not completed.

Preselection: high sensitivity, switching frequency 500/s via control panel.

Teach-in via control panel:

- Place mark in light spot.
- Press the Teach-in button on the sensor for longer than 1 s.
First Teach-in procedure is triggered.
- Place the light spot on the background, and then trigger the second Teach-in procedure via the control wire.
- Press the Teach-in button in the next 2 seconds.

Confirmation:

LED and status indicator blink 2 x shortly = Teach-in procedure completed with high sensitivity (500/s).
LED and status indicator blink rapidly = Teach-in procedure not completed.